


Chip Monolithic Ceramic Capacitor

### Electrical Characteristics Data

#### 0603 Y5V 0.1uF 50 V (0603F104Z500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [uF]	0.1(-20/+80%)
DF	≤ 7%
IR [G-ohm]	5

3. Impedance/ESR-Frequency

(Equipment: 4294A)

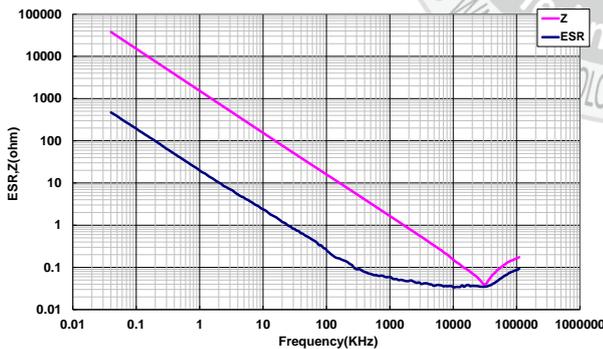

5. Temperature Rise – Ripple Current


(Equipment: 11810)

Over the measure limit.

6. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

25V : -71.54% ; 50V : -87.54%

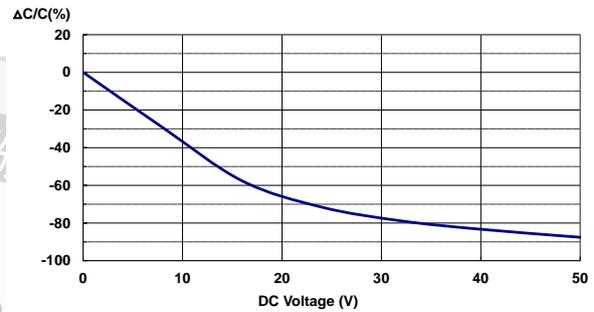


7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

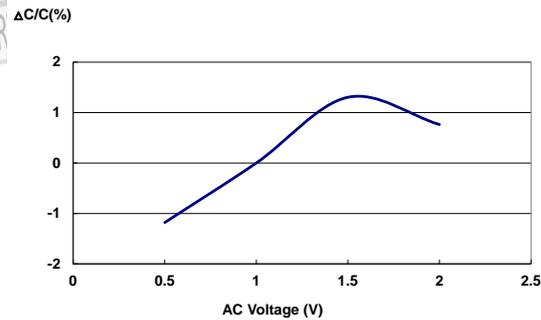

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

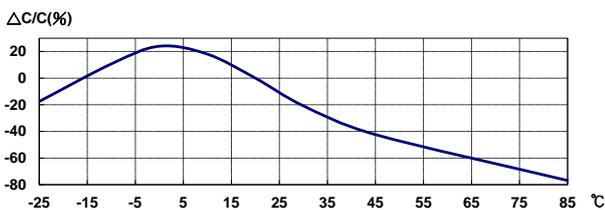

Last updated : 2018/07/17